
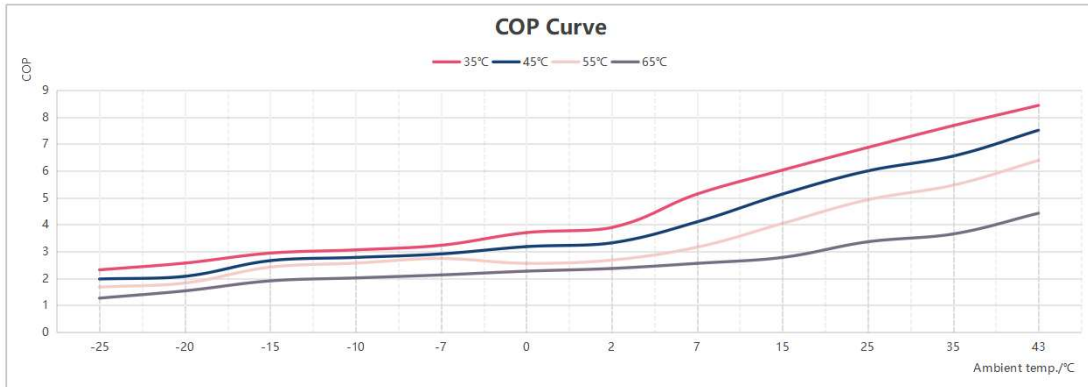


# iGXC11T Performance Curve


Nominal Heating Capacity(kW)												
Ambient temp./°C \ Outlet temp./°C	-25	-20	-15	-10	-7	0	2	7	15	25	35	43
35	7.47	9.04	10.24	11.03	11.38	11.43	11.48	11.53	12.39	13.08	14.05	15.38
45	7.04	8.70	9.78	10.23	11.14	11.16	11.20	11.25	12.05	12.59	13.39	14.92
55	6.54	7.75	9.48	10.04	10.58	10.63	10.70	10.90	11.68	12.07	12.78	13.46
65	5.46	7.06	9.06	9.47	9.89	10.08	10.23	10.36	11.15	11.75	12.15	13.09
70	/	6.54	8.17	8.46	8.99	9.04	9.25	9.88	10.40	10.54	/	/
75	/	/	/	7.27	8.35	8.46	8.68	9.06	9.78	/	/	/

COP(W/W)												
Ambient temp./°C \ Outlet temp./°C	-25	-20	-15	-10	-7	0	2	7	15	25	35	43
35	2.32	2.57	2.94	3.06	3.23	3.70	3.89	5.14	6.03	6.87	7.68	8.44
45	1.98	2.08	2.66	2.78	2.91	3.18	3.32	4.10	5.14	6.00	6.55	7.51
55	1.68	1.83	2.42	2.57	2.74	2.56	2.68	3.16	4.04	4.92	5.47	6.39
65	1.26	1.53	1.91	2.02	2.13	2.27	2.37	2.56	2.78	3.36	3.65	4.42
70	/	1.31	1.78	1.79	1.91	1.93	1.97	2.06	2.32	3.03	/	/
75	/	/	/	1.55	1.64	1.71	1.74	1.84	2.08	/	/	/

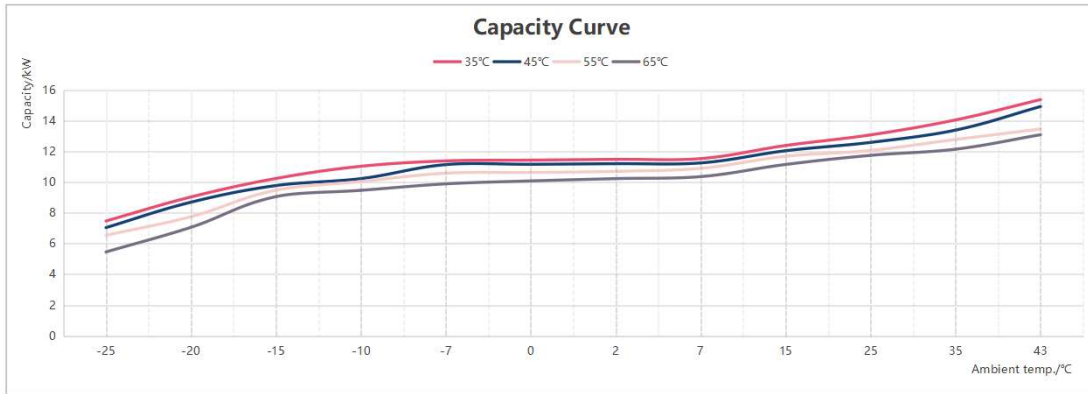

Max. COP									
Ambient temp./°C Outlet water/°C	-25	-20	-15	-10	7	15	25	35	43
35	2.75	2.93	3.33	3.93	7.00	8.12	9.07	9.84	10.50

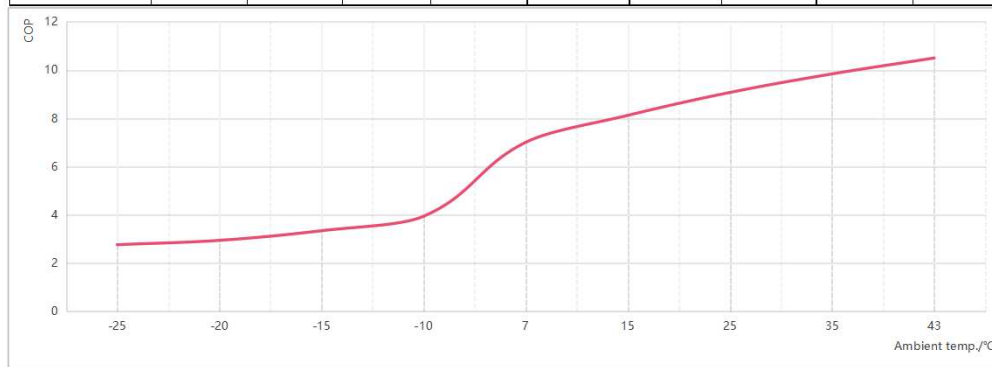

\*Updated on December 10th, 2025, only for reference  
 \*The COP data does not include heat loss due to defrosting.